

JAGO RECESSED LUMINAIRE 905



Jago 匠光

905 嵌入灯

Recessed luminaires technical data sheet


905 匠光线形嵌入灯为简约式LED灯具，采用优质铝合金型材灯体，无螺丝压铸铝端盖，表面细沙氧化，阻燃PC透镜+阻燃PC防眩罩，灯具线条硬朗美观、外观尺寸比例科学，结构合理，安装维护方便灵活。灯具结合TIR控光技术，实现精准控制与高效率传递的统一，软开关技术体验耐贝西曲线舒缓而渐入佳境。先进的热管理技术，散热优异，确保了灯具最大光输出的持续性及色温的一致性。

应用场所：写字楼、学校、医院、高档超市、商场、酒店等公共建筑。

905 series recessed mounted linear LED luminaire, housing made of high pressure extruded aluminum construction, die-cast aluminum end caps with no visible screws, Surface treatment is the sand oxidation and Flame retardant PC lens + flame retardant PC anti-glare cover, UV and corrosion resistance, with beautiful appearance, the scientific proportion and reasonable dimensions, flexible installing methods, light body, excellent heat dissipation. The luminaire adopted TIR optic-control technology, achieve unification between precise control and high efficiency. Getting better with the "Lumbency curve" that brought by unique soft switch technology. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens.

Applications: Office, Educational Institutes, Hospitals, Warehouses, Hospitality, Retailers Etc.

产品细节 Details

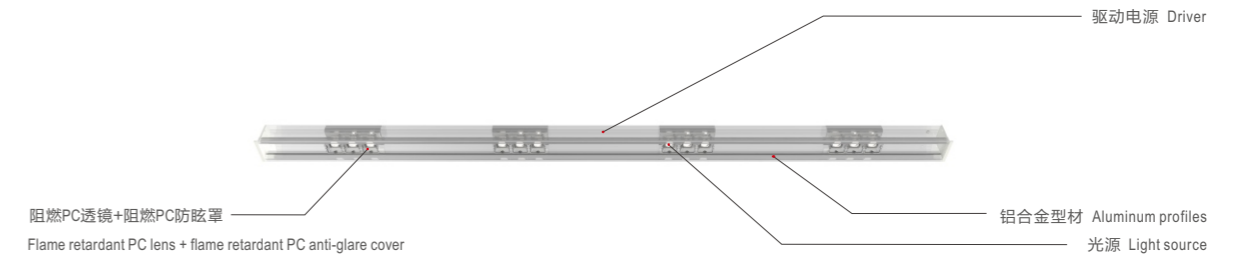





规格参数 Technical Data

名称: 905 嵌入灯
 类型: 嵌入灯
 灯体材料: 优质铝合金
 表面处理: 哑光粉末喷涂 (哑光白)
 控光面罩: 阻燃PC透镜+阻燃PC防眩罩
 光源: SMD
 整灯光效: 80 lm/W
 显色指数: >90
 色温: 3000K / 4000K / 6500K
 输入电压: 220V / 50Hz
 驱动电源: 高转换率驱动电源
 灯具寿命: 3万小时
 电气等级: I

Product name: 905 Recessed luminaire
Type: Recessed luminaires
Housing material: High-quality Aluminum alloy
Surface finish: Matte powder coating (matte white)
Diffuser material: Flame retardant PC lens + flame retardant PC anti-glare cover
Light source: SMD
Luminaire efficiency: 80 lm/W
CRI: >90
Color temperature: 3000K / 4000K / 6500K
Input voltage: 220V / 50Hz
Driver: High efficiency driver
Lifespan: 30000h
Electrical grade: I

Indoor 室内适用	General lighting 基础照明	High efficiency 高光效	Clear color 高显指	Long life 重点照明	Long life 长寿命
Anti glare 防眩光	Accurate light distribution 准配光	No flickering 无频闪	IP 20 Protection level 防护等级	Fire protection 防火	Low lumen depreciation 低光衰
Microwave sensor 微波感应控制	DALI	light control 光控	Wifi or Ble, Zigbee	1-10V 1-10V dimming 1-10V调光	China Compulsory Certification 3C认证
CE certification CE认证	CB certification CB认证				

标准灯具 Standard single fitting

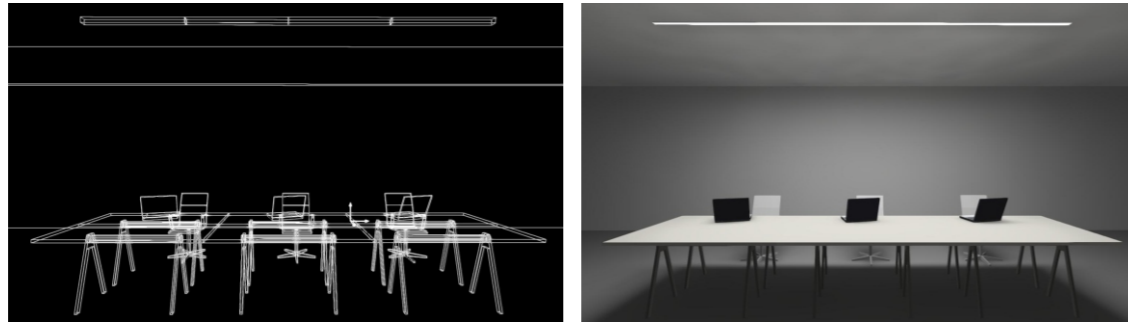

嵌入灯 (Recessed luminaires)

CCT: 3000K
Colors: White

Item No	Power Flux	L*W*H
905-RM1200H36W	36W / 2880 lm	1200*51*51
905-RM1800H54W	54W / 4320 lm	1800*51*51

嵌入灯 (Recessed luminaires)

CCT: 4000K
Colors: White

Item No	Power Flux	L*W*H
905-RM1200H36W	36W / 2900 lm	1200*51*51
905-RM1800H54W	54W / 4340 lm	1800*51*51

嵌入灯 (Recessed luminaires)


CCT: 6500K
Colors: White

Item No	Power Flux	L*W*H
905-RM1200H36W	36W / 2920 lm	1200*51*51
905-RM1800H54W	54W / 4360 lm	1800*51*51

应用参考 Application reference

Open space: 10m x 10m x 3m; reflectance (%): ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height

开放式空间: 10m x 10m x 3m; 反射率(%): 天花板 80/墙壁50/地板20; 照度为 0.75m工作面平均照度; H为灯具安装离地高度。

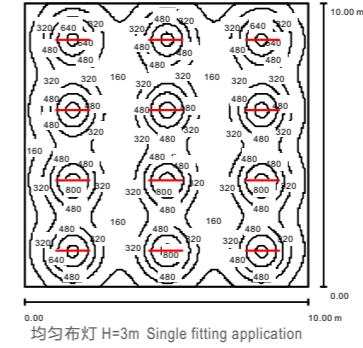

均匀布灯 H=3m Single fitting application

Item No	Power Flux	Number	W/m ²	H=3m Illuminance(Lux)
905-RM1200T36W	36W / 2880 lm	12	4.32	380

关联产品 Related products

