

# JAGO RECTANGLE DOWN LIGHT 907



## Jago 匠光

### 907 条形筒射灯

Rectangle down light technical data sheet


907 匠光条形筒射灯为简约式LED灯具，采用优质铝合金型材灯体，无螺丝压铸铝端盖，表面细沙氧化，阻燃PC透镜+阻燃PC防眩罩，灯具线条硬朗美观、外观尺寸比例科学，结构合理，安装维护方便灵活。灯具结合TIR控光技术，实现精准控制与高效率传递的统一，软开关技术体验耐贝西曲线舒缓而渐入佳境。先进的热管理技术，散热优异，确保了灯具最大光输出的持续性及色温的一致性。

应用场所：写字楼、学校、医院、高档超市、商场、酒店等公共建筑。

907 series rectangle down light LED luminaire, housing made of high pressure extruded aluminum construction, die-cast aluminum end caps with no visible screws, Surface treatment is the sand oxidation and Flame retardant PC lens + flame retardant PC anti-glare cover, UV and corrosion resistance, with beautiful appearance, the scientific proportion and reasonable dimensions, flexible installing methods, light body, excellent heat dissipation. The luminaire adopted TIR optic-control technology, achieve unification between precise control and high efficiency. Getting better with the "Lumbency curve" that brought by unique soft switch technology. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens.

Applications: Office, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc.

## 产品细节 Details

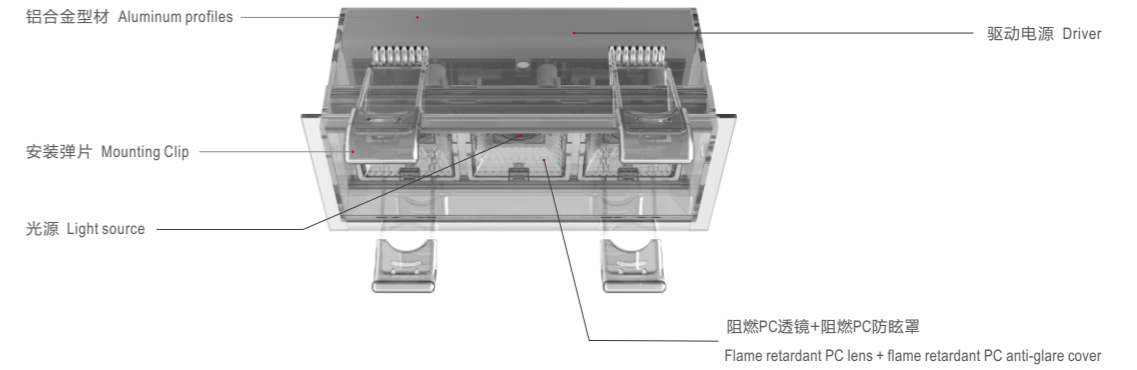







## 规格参数 Technical Data

名称: 907 条形筒射灯  
 类型: 条形筒射灯  
 灯体材料: 优质铝合金  
 表面处理: 细沙氧化(银色/褐灰色/哑光黑) 哑光粉末喷涂(哑光白)  
 控光面罩: 阻燃PC透镜+阻燃PC防眩罩  
 光源: SMD  
 整灯光效: 80 lm/W  
 显色指数: >90  
 色温: 3000K / 4000K / 6500K  
 输入电压: 220V / 50Hz  
 驱动电源: 高转换率驱动电源  
 灯具寿命: 3万小时  
 电气等级: II


**Product name:** 907 Rectangle down light  
**Type:** Rectangle down light  
**Housing material:** High-quality Aluminum alloy  
**Surface finish:** Fine sand oxidation (silver/brown gray/black) Matte powder coating (matte white)  
**Diffuser material:** Flame retardant PC lens + flame retardant PC anti-glare cover  
**Light source:** SMD  
**Luminaire efficiency:** 80 lm/W  
**CRI:** >90  
**Color temperature:** 3000K / 4000K / 6500K  
**Input voltage:** 220V / 50Hz  
**Driver:** High efficiency driver  
**Lifespan:** 30000h  
**Electrical grade:** II





标准灯具 Standard single fitting

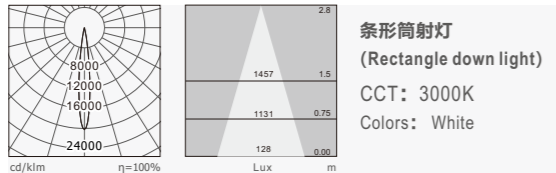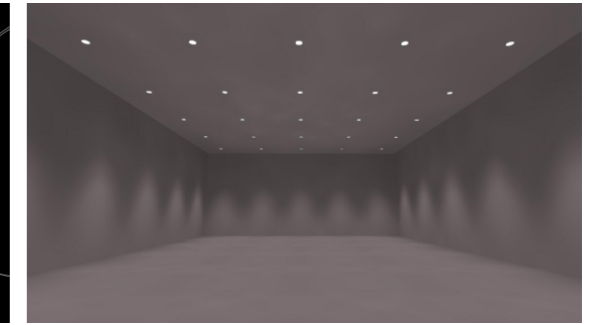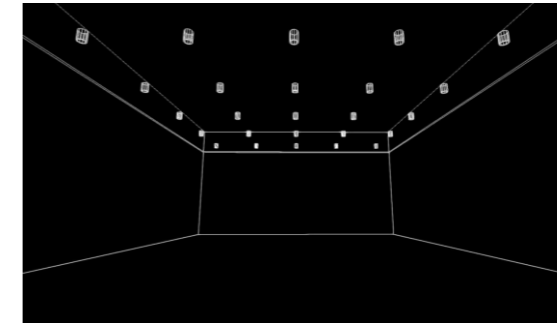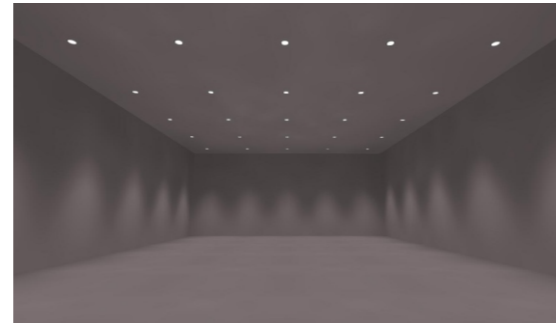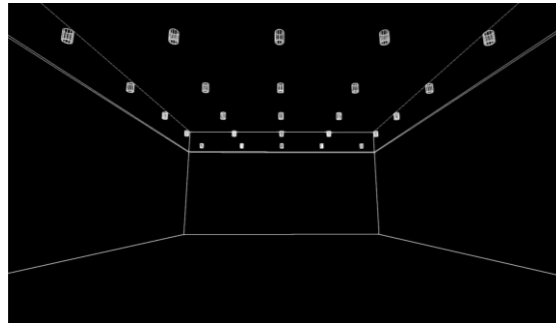


Item No	Power   Flux	Beam angle	L*W*H
907-FM52T3W	3W / 240 lm	12°	52*51*51

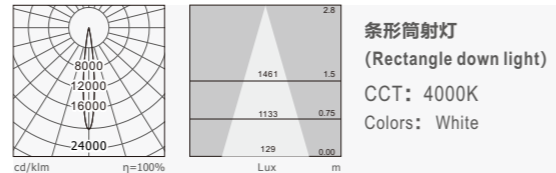



Item No	Power   Flux	Beam angle	L*W*H
907-FM52T3W	3W / 260 lm	12°	52*51*51

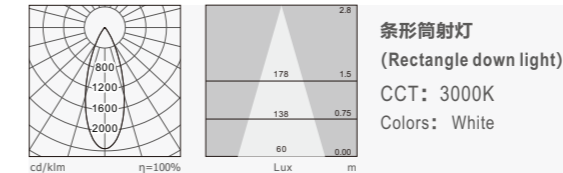




Item No	Power   Flux	Beam angle	L*W*H
907-FM52T3W	3W / 240 lm	36°	52*51*51

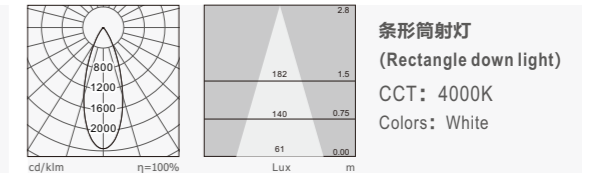



Item No	Power   Flux	Beam angle	L*W*H
907-FM52T3W	3W / 260 lm	36°	52*51*51

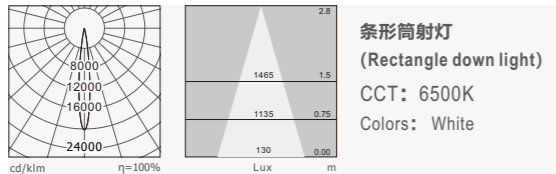


Item No	Power   Flux	Beam angle	L*W*H
907-FM52T3W	3W / 280 lm	12°	52*51*51

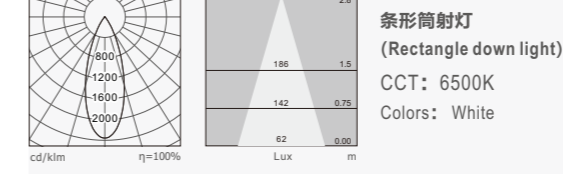


Item No	Power   Flux	Beam angle	L*W*H
907-FM52T3W	3W / 280 lm	36°	52*51*51

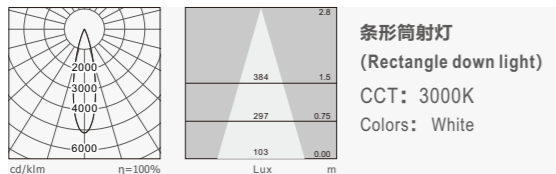


Item No	Power   Flux	Beam angle	L*W*H
907-FM52T3W	3W / 240 lm	24°	52*51*51

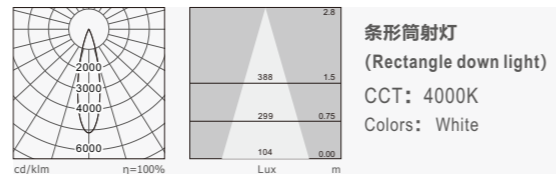



Item No	Power   Flux	Beam angle	L*W*H
907-FM52T3W	3W / 260 lm	24°	52*51*51

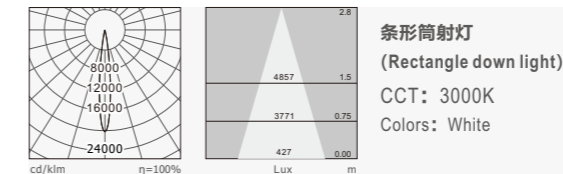




Item No	Power   Flux	Beam angle	L*W*H
907-FM111T10W	10W / 800 lm	12°	111*51*51

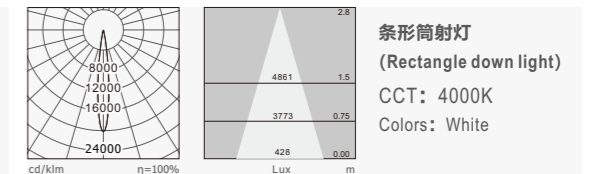


Item No	Power   Flux	Beam angle	L*W*H
907-FM111T10W	10W / 820 lm	12°	111*51*51





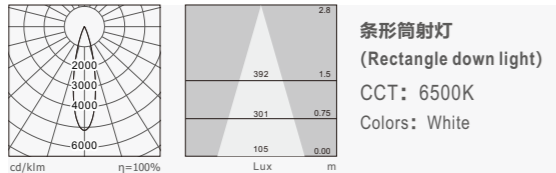



Item No	Power   Flux	Beam angle	L*W*H
907-FM52T3W	3W / 280 lm	24°	52*51*51

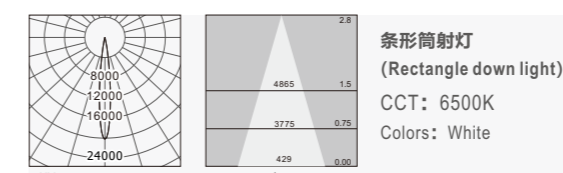



Item No	Power   Flux	Beam angle	L*W*H
907-FM111T10W	10W / 840 lm	12°	111*51*51



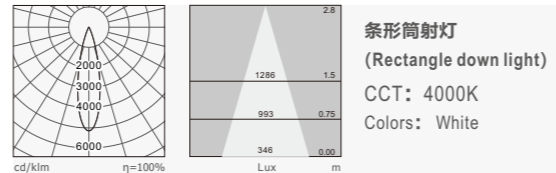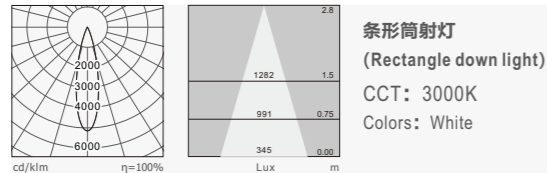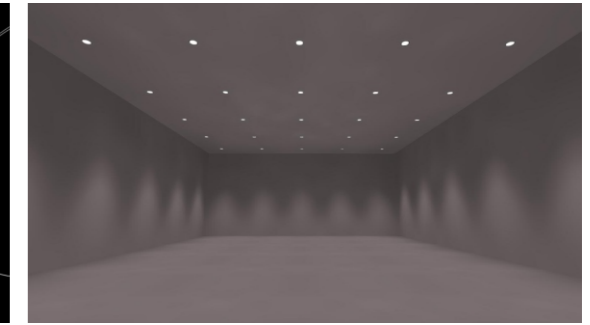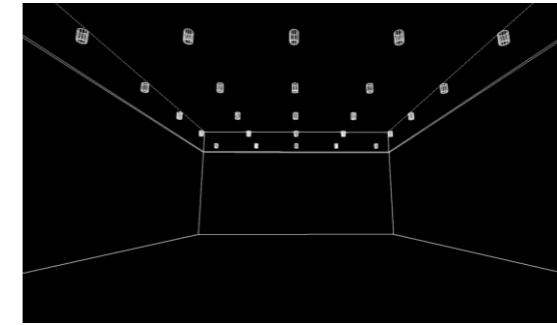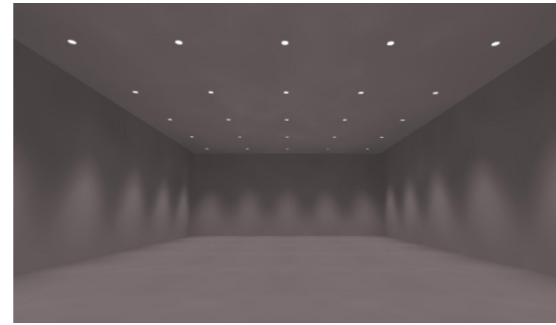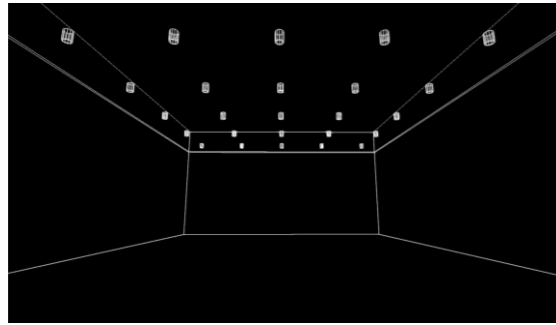




Item No	Power   Flux	Beam angle	L*W*H
907-FM111T10W	10W / 800 lm	24°	111*51*51

Item No	Power   Flux	Beam angle	L*W*H
907-FM111T10W	10W / 820 lm	24°	111*51*51


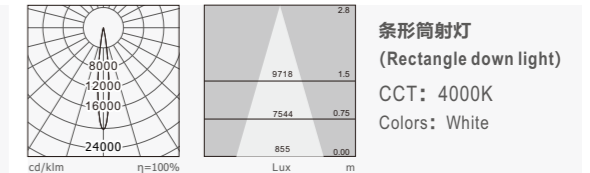
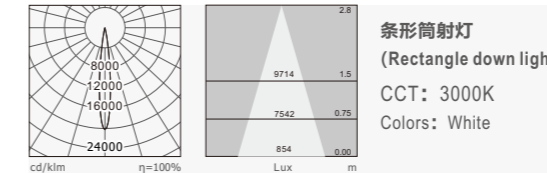


Item No	Power   Flux	Beam angle	L*W*H
907-FM207T20W	20W / 1600 lm	12°	207*51*51


Item No	Power   Flux	Beam angle	L*W*H
907-FM207T20W	20W / 1620 lm	12°	207*51*51

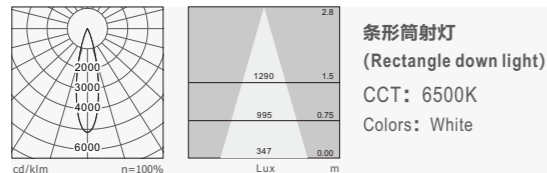


Item No	Power   Flux	Beam angle	L*W*H
907-FM111T10W	10W / 840 lm	24°	111*51*51

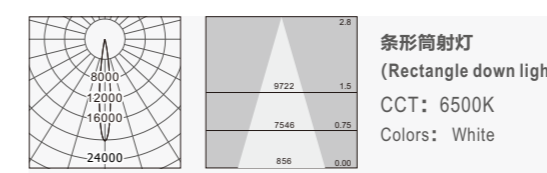



Item No	Power   Flux	Beam angle	L*W*H
907-FM207T20W	20W / 1640 lm	12°	207*51*51

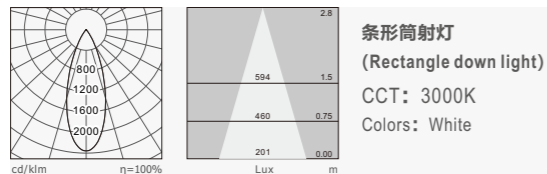


Item No	Power   Flux	Beam angle	L*W*H
907-FM111T10W	10W / 800 lm	36°	111*51*51

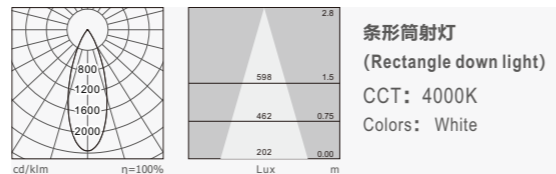




Item No	Power   Flux	Beam angle	L*W*H
907-FM111T10W	10W / 820 lm	36°	111*51*51

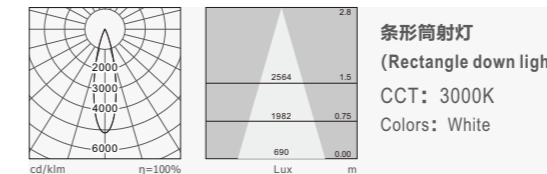



Item No	Power   Flux	Beam angle	L*W*H
907-FM207T20W	20W / 1600 lm	24°	207*51*51

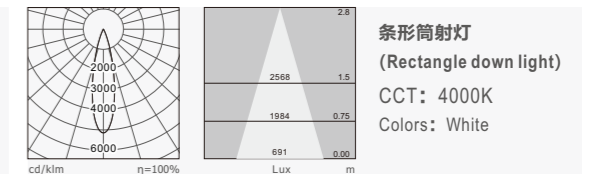






Item No	Power   Flux	Beam angle	L*W*H
907-FM207T20W	20W / 1620 lm	24°	207*51*51

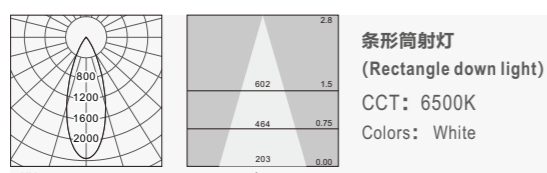

Item No	Power   Flux	Beam angle	L*W*H
907-FM111T10W	10W / 840 lm	36°	111*51*51

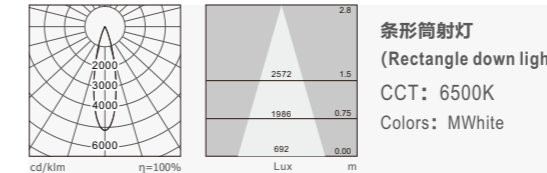



Item No	Power   Flux	Beam angle	L*W*H
907-FM207T20W	20W / 1640 lm	24°	207*51*51

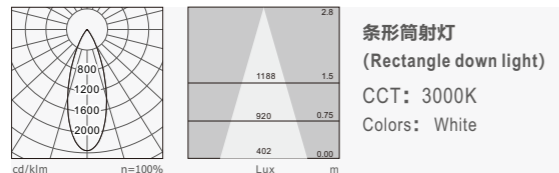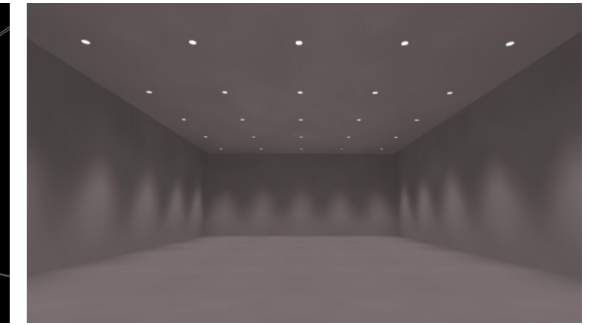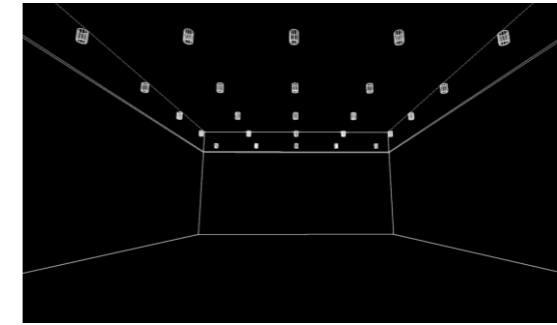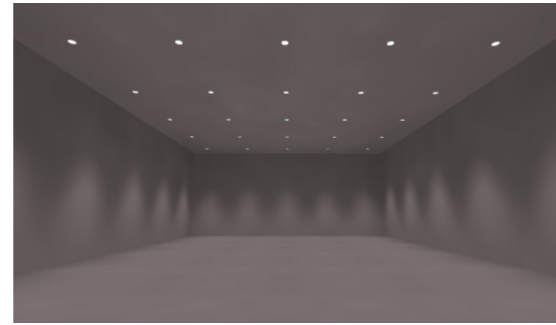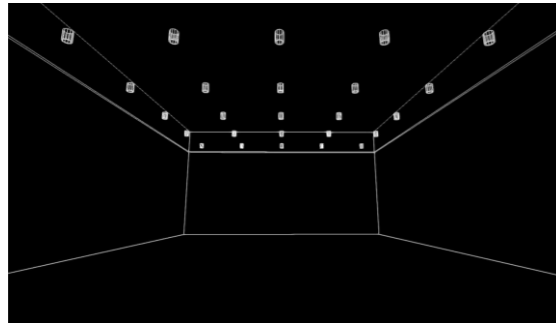


条形筒射灯  
(Rectangle down light)  
 CCT: 3000K  
 Colors: White

Item No 907-FM207T20W  
 Power | Flux 20W / 1600 lm  
 Beam angle 36°  
 L\*W\*H 207\*51\*51





条形筒射灯  
(Rectangle down light)  
 CCT: 4000K  
 Colors: White

Item No 907-FM207T20W  
 Power | Flux 20W / 1620 lm  
 Beam angle 36°  
 L\*W\*H 207\*51\*51

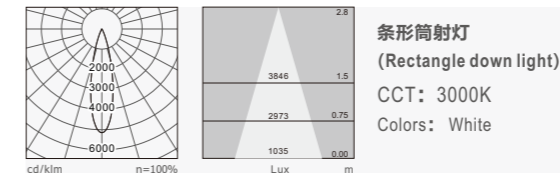



条形筒射灯  
(Rectangle down light)  
 CCT: 3000K  
 Colors: White

Item No 907-FM303T30W  
 Power | Flux 30W / 2400 lm  
 Beam angle 24°  
 L\*W\*H 303\*51\*51






条形筒射灯  
(Rectangle down light)  
 CCT: 4000K  
 Colors: White

Item No 907-FM303T30W  
 Power | Flux 30W / 2420 lm  
 Beam angle 24°  
 L\*W\*H 303\*51\*51

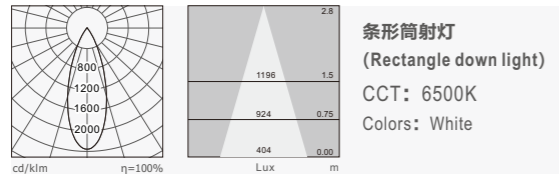



条形筒射灯  
(Rectangle down light)  
 CCT: 6500K  
 Colors: White

Item No 907-FM207T20W  
 Power | Flux 20W / 1640 lm  
 Beam angle 36°  
 L\*W\*H 207\*51\*51

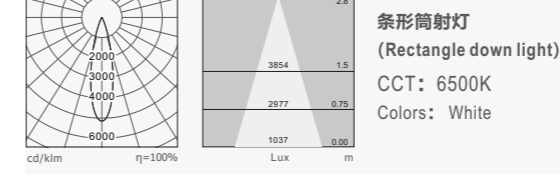



条形筒射灯  
(Rectangle down light)  
 CCT: 6500K  
 Colors: White

Item No 907-FM303T30W  
 Power | Flux 30W / 2440 lm  
 Beam angle 24°  
 L\*W\*H 303\*51\*51

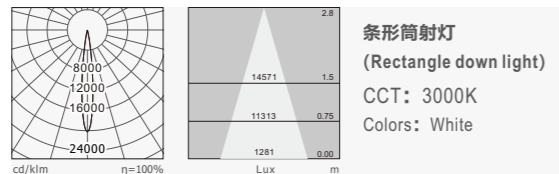


条形筒射灯  
(Rectangle down light)  
 CCT: 3000K  
 Colors: White

Item No 907-FM303T30W  
 Power | Flux 30W / 2400 lm  
 Beam angle 12°  
 L\*W\*H 303\*51\*51





条形筒射灯  
(Rectangle down light)  
 CCT: 4000K  
 Colors: White

Item No 907-FM303T30W  
 Power | Flux 30W / 2420 lm  
 Beam angle 12°  
 L\*W\*H 303\*51\*51

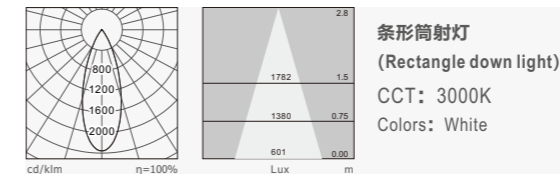



条形筒射灯  
(Rectangle down light)  
 CCT: 3000K  
 Colors: White

Item No 907-FM303T30W  
 Power | Flux 30W / 2400 lm  
 Beam angle 36°  
 L\*W\*H 303\*51\*51






条形筒射灯  
(Rectangle down light)  
 CCT: 4000K  
 Colors: White

Item No 907-FM303T30W  
 Power | Flux 30W / 2420 lm  
 Beam angle 36°  
 L\*W\*H 303\*51\*51

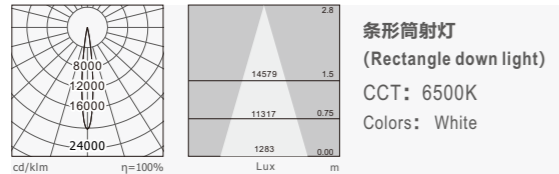

条形筒射灯  
(Rectangle down light)  
 CCT: 6500K  
 Colors: White

Item No 907-FM303T30W  
 Power | Flux 30W / 2440 lm  
 Beam angle 12°  
 L\*W\*H 303\*51\*51

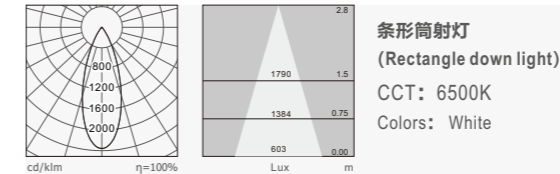

条形筒射灯  
(Rectangle down light)  
 CCT: 6500K  
 Colors: White

Item No 907-FM303T30W  
 Power | Flux 30W / 2440 lm  
 Beam angle 36°  
 L\*W\*H 303\*51\*51

