

STARRY SUSPENDED LUMINAIRE 746



Starry 星空

746 吊灯

Suspended luminaires technical data sheet

746 星空系列吊灯，采用优质铝合金型材灯体，外观尺寸比例科学，结构合理，线条流畅美观。先进的侧发光导光技术结合上下出光的直接+间接照明模式，再加上高透光率光学级纯料PMMA导光板，使其出光均匀无阴影、防眩光效果更好，先进的热管理技术，散热效果优异，确保了灯具最大光输出的持续性及色温的一致性。746星空系列有吊灯、落地灯、台面阅读灯等。

应用场所：办公室、学校、医院、酒店、商场、公共建筑、机场车站等。

746 series Suspended luminaire with aluminum alloy structure integrated with advanced side light transmittance technology, direct and indirect light illuminating, high transmitting optical light guide PMMA plate create shadow free and uniform light output without any glare, Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens. Suspended, ceiling surface mounted lamp, wall lamp, floor lamp, desk reading lamp are available for 746 series.

Applications: Offices, schools, hospitals, hotels, shopping malls, public buildings, airport halls etc.

产品细节 Details








规格参数 Technical Data

名称: 746 吊灯
 类型: 吊灯
 灯体材料: 优质铝合金
 表面处理: 静电烤漆
 控光面罩: PMMA
 光源: SMD
 整灯光效: 90 lm/W
 显色指数: ≥83
 色温: 3000K / 4000K / 6500K
 输入电压: 220-240V
 驱动电源: 高转换率驱动电源
 灯具寿命: 3万小时
 电气等级: I

Product name: 746 Suspended luminaire
Type: Suspended luminaires
Housing material: High-quality Aluminum alloy
Surface finish: Electrostatic thermo-painting
Diffuser material: PMMA
Light source: SMD
Luminaire efficiency: 90 lm/W
CRI: ≥83
Color temperature: 3000K / 4000K / 6500K
Input voltage: 220-240V
Driver: High efficiency driver
Lifespan: 30000h
Electrical grade: I


Indoor 室内适用	General lighting 基础照明	High efficiency 高光效	Long life 长寿命	Anti glare 防眩光	Accurate light distribution 准配光
No flickering 无频闪	IP 20 Protection level 防护等级	Protective grounding 保护接地	Fire protection 防火	Low lumen depreciation 低光衰	color-temp changing 调色温驱动电源
Microwave sensor 微波感应控制	Emergency kits 应急照明组件	DALI	light control 光控	Wifi or Ble, Zigbee	1-10V 1-10V dimming 1-10V调光
China Compulsory Certification 3C认证	CE certification CE认证	CB certification CB认证			

标准灯具 Standard single fitting

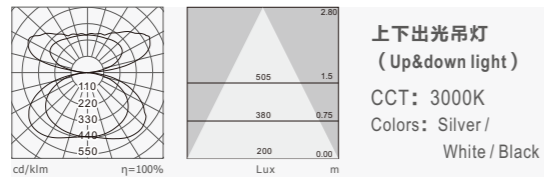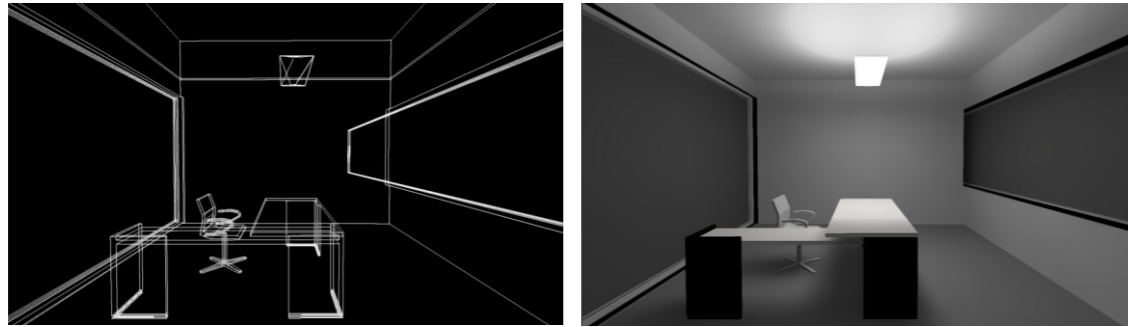


上下出光吊灯
 (Up&down light)
 CCT: 3000K
 Colors: Silver /
 White / Black

Item No	Power Flux	L*W*H
746-SS1170T36W	36W / 3240 lm	1170*320*20

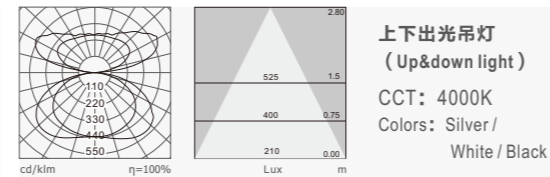

上下出光吊灯
 (Up&down light)
 CCT: 4000K
 Colors: Silver /
 White / Black

Item No	Power Flux	L*W*H
746-SS1170T36W	36W / 3260 lm	1170*320*20

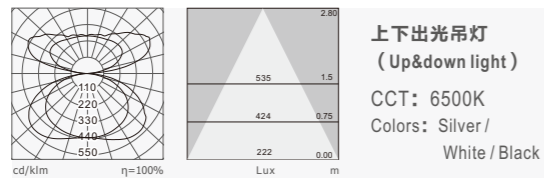


上下出光吊灯
 (Up&down light)
 CCT: 6500K
 Colors: Silver /
 White / Black

Item No	Power Flux	L*W*H
746-SS1170T36W	36W / 3280 lm	1170*320*20


应用参考 Application reference

Open space: 10m x 10m x 3m; reflectance (%) : ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height

开放式空间: 10m x 10m x 3m; 反射率(%): 天花板 80/墙壁50/地板20; 照度为 0.75m工作面平均照度; H为灯具 安装离地高度。

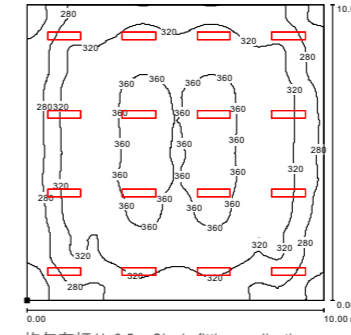

均匀布灯 H=2.5m Single fitting application

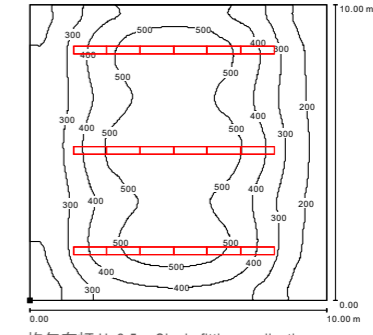

均匀布灯 H=2.5m Single fitting application

Item No	Power Flux	Number	W/m ²	H=2.8m Illuminance(Lux)
746-SS1170T36W	36W / 3240 lm	16	5.76	323
746-SS200T216W	216W / 19440 lm	3	6.48	389

关联产品 Related products



P119



P119



→
 Starry
 星空系列
 746吊灯
 实景图