
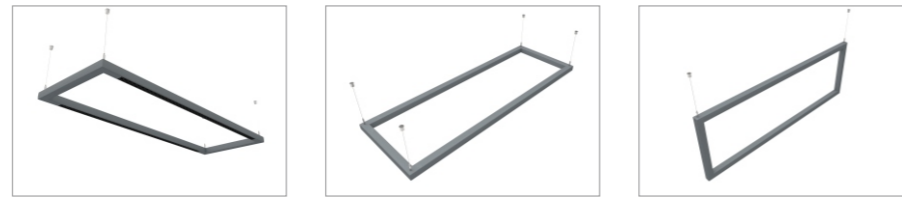


JAGO SUSPENDED LUMINAIRE 901A/B

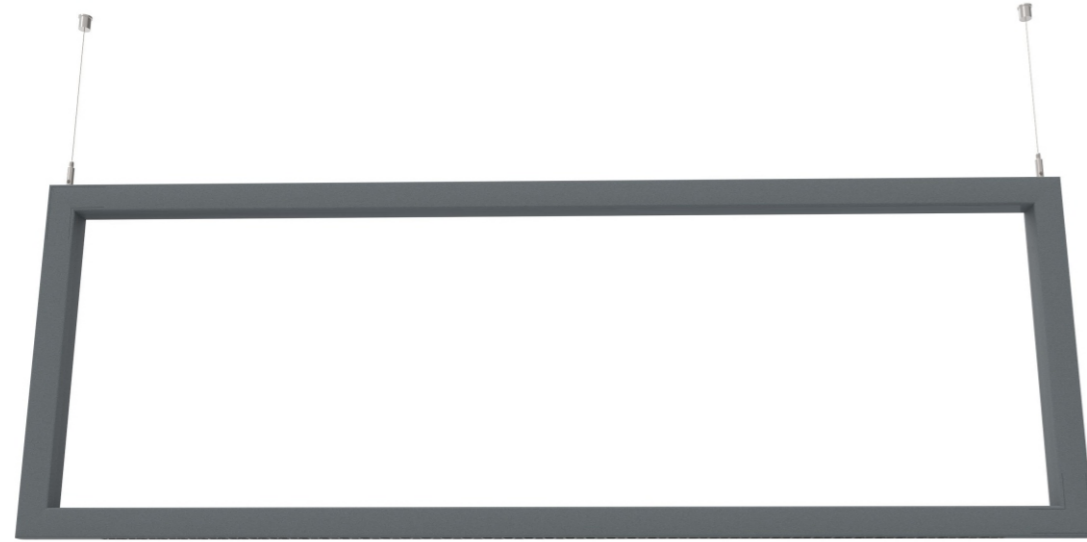

Jago 匠光

901A/B 吊灯


Suspended luminaires technical data sheet

901A/B 匠光线形吊灯为简约式LED灯具，采用优质铝合金型材灯体，无螺丝压铸铝端盖，表面细沙氧化，阻燃PC蜂窝格栅面罩，灯具线条硬朗美观、外观尺寸比例科学，结构合理，安装维护方便灵活。灯具结合TIR控光技术，实现精准控制与高效率传递的统一，软开关技术体验耐贝西曲线舒缓而渐入佳境。先进的热管理技术，散热优异，确保了灯具最大光输出的持续性及色温的一致性。
应用场所：写字楼、学校、医院、高档超市、商场、酒店等公共建筑。

901A/B series suspend mounted linear LED luminaire, housing made of high pressure extruded aluminum construction, die-cast aluminum end caps with no visible screws, Surface treatment is the sand oxidation and Flame retardant PC honeycomb louver, UV and corrosion resistance, with beautiful appearance, the scientific proportion and reasonable dimensions, flexible installing methods, light body, excellent heat dissipation. The luminaire adopted TIR optic-control technology, achieve unification between precise control and high efficiency. Getting better with the "Lumbency curve" that brought by unique soft switch technology. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens.

Applications: Office, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc.

产品细节 Details

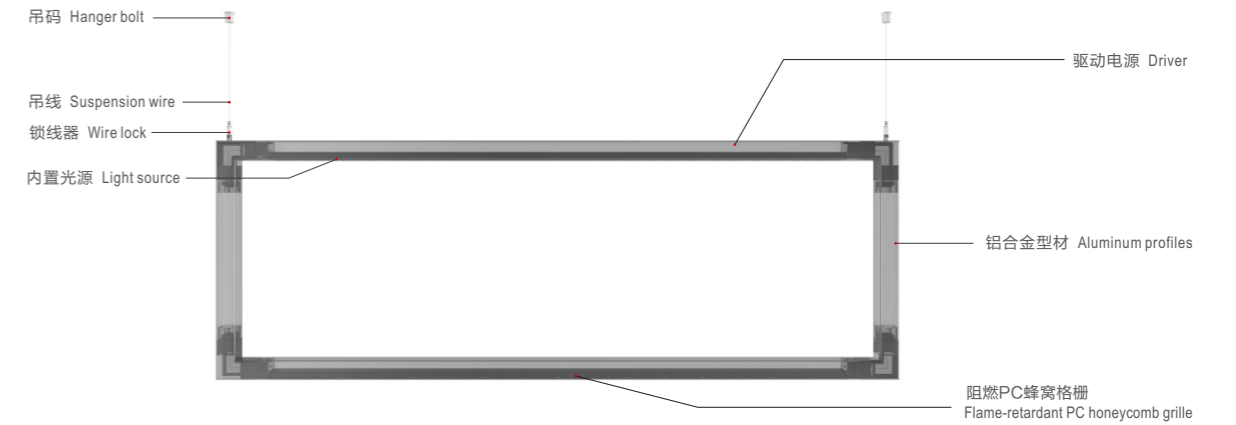

规格参数 Technical Data







名称: 901A/B 吊灯
 类型: 吊灯
 灯体材料: 优质铝合金
 表面处理: 细沙氧化(银色/褐灰色/哑光黑)
 哑光粉末喷涂(哑光白)
 控光面罩: 阻燃PC蜂窝格栅
 光源: SMD
 整灯光效: 90 lm/W
 显色指数: >90
 色温: 3000K / 4000K / 6500K
 输入电压: 220V / 50Hz
 驱动电源: 高转换率驱动电源
 灯具寿命: 3万小时
 电气等级: I

Product name: 901A/B Suspended luminaire
Type: Suspended
Housing material: High-quality Aluminum alloy
Surface finish: Fine sand oxidation (silver/brown gray/black)
 Matte powder coating (matte white)
Diffuser material: Flame-retardant PC honeycomb grille
Light source: SMD
Luminaire efficiency: 90 lm/W
CRI: >90
Color temperature: 3000K / 4000K / 6500K
Input voltage: 220V / 50Hz
Driver: High efficiency driver
Lifespan: 30000h
Electrical grade: I

Indoor 室内适用	General lighting 基础照明	High efficiency 高光效	Clear color 高显指	Long life 长寿命	Anti glare 防眩光
Accurate light distribution 准配光	No flickering 无频闪	IP 20 Protection level 防护等级	Protective grounding 保护接地	Fire protection 防火	Low lumen depreciation 低光衰
color-temp changing 调色温驱动电源	Microwave sensor 微波感应控制	DALI	light control 光控	Wifi or Ble, Zigbee	1-10V 1-10V dimming 1-10V调光
China Compulsory Certification 3C认证	CE certification CE认证	CB certification CB认证			



标准灯具 Standard single fitting

标准灯具 Standard single fitting

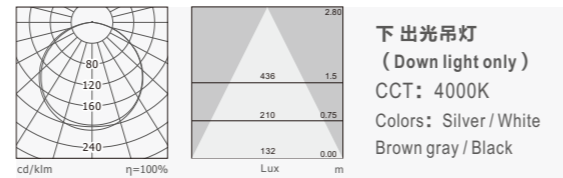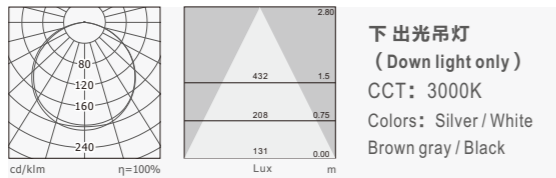
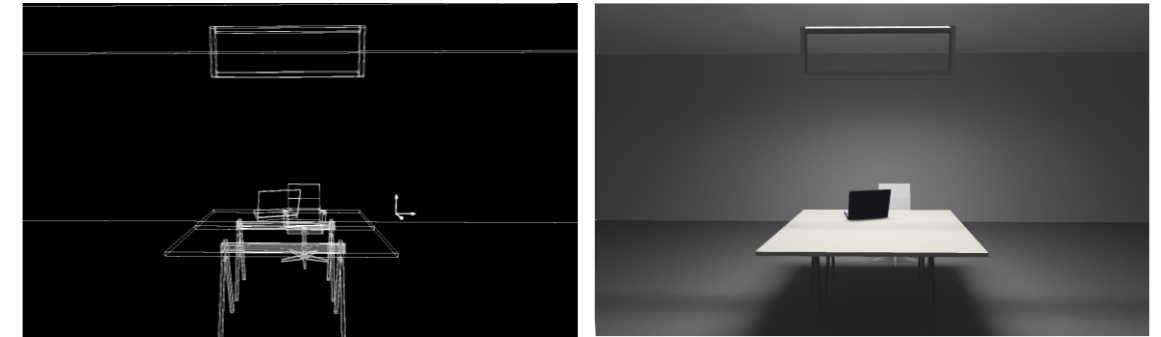
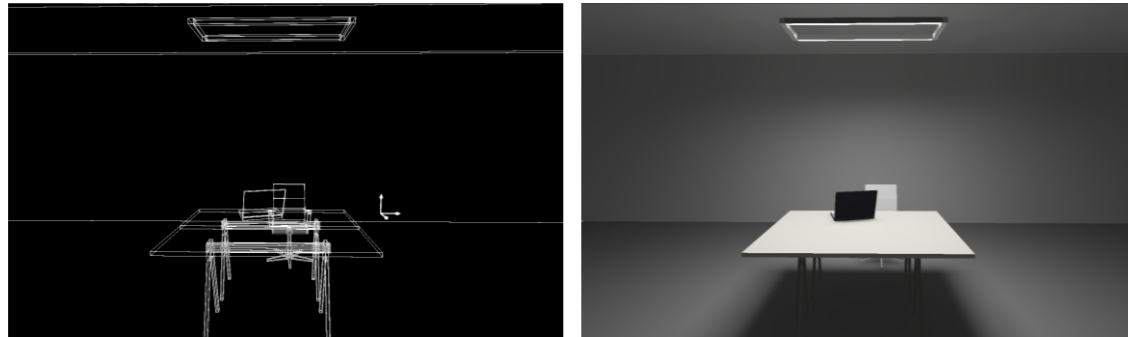


Item No	Power Flux	L*W*H
901A-SB1200H36W	36W / 3240 lm	1200*320*40
901A-SB1800H54W	54W / 4860 lm	1800*320*40
901A-SB1200H72W	72W / 6480 lm	1200*320*40
901A-SB1800H108W	108W / 9720 lm	1800*320*40


Item No	Power Flux	L*W*H
901A-SB1200H36W	36W / 3260 lm	1200*320*40
901A-SB1800H54W	54W / 4880 lm	1800*320*40
901A-SB1200H72W	72W / 6500 lm	1200*320*40
901A-SB1800H108W	108W / 9740 lm	1800*320*40

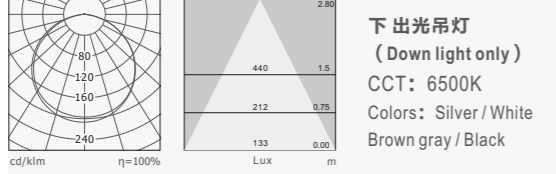



Item No	Power Flux	L*W*H
901A-SB1200H36W	36W / 3280 lm	1200*320*40
901A-SB1800H54W	54W / 4900 lm	1800*320*40
901A-SB1200H72W	72W / 6520 lm	1200*320*40
901A-SB1800H108W	108W / 9760 lm	1800*320*40

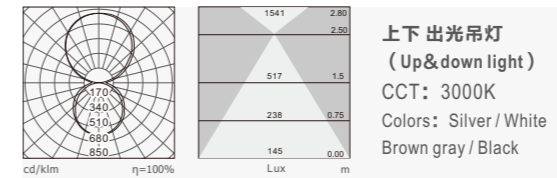

Item No	Power Flux	L*W*H
901B-SB1200H36W	36W / 3240 lm	1200*40*320
901B-SB1800H54W	54W / 4860 lm	1800*40*320
901B-SB1200H72W	72W / 6480 lm	1200*40*320
901B-SB1800H108W	108W / 9720 lm	1800*40*320

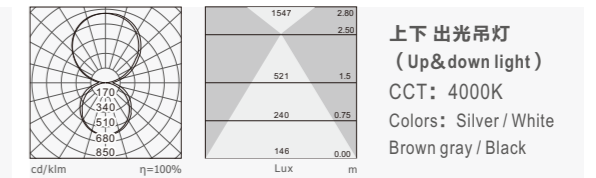

Item No	Power Flux	L*W*H
901B-SB1200H36W	36W / 3260 lm	1200*40*320
901B-SB1800H54W	54W / 4880 lm	1800*40*320
901B-SB1200H72W	72W / 6500 lm	1200*40*320
901B-SB1800H108W	108W / 9740 lm	1800*40*320

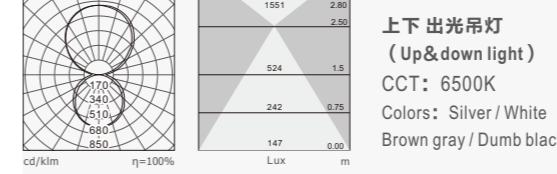


Item No	Power Flux	L*W*H
901B-SB1200H36W	36W / 3280 lm	1200*40*320
901B-SB1800H54W	54W / 4900 lm	1800*40*320
901B-SB1200H72W	72W / 6520 lm	1200*40*320
901B-SB1800H108W	108W / 9760 lm	1800*40*320

应用参考 Application reference

应用参考 Application reference

Open space: 10m x 10m x 3m; reflectance (%): ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height


开放式空间: 10m x 10m x 3m; 反射率(%): 天花板 80/墙壁50/地板20; 照度为 0.75m工作面平均照度; H为灯具安装离地高度。

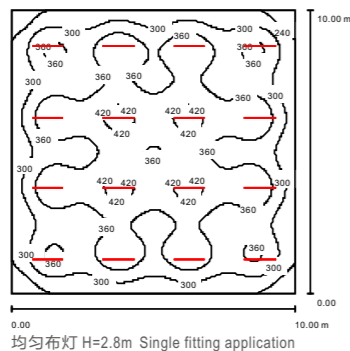

Item No	Power Flux	Number	W/m ²	H=2.5m Illuminance(Lux)
901A-SB1200T36W	36W / 3240 lm	16	5.76	342

Open space: 10m x 10m x 3m; reflectance (%): ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height

开放式空间: 10m x 10m x 3m; 反射率(%): 天花板 80/墙壁50/地板20; 照度为 0.75m工作面平均照度; H为灯具安装离地高度。

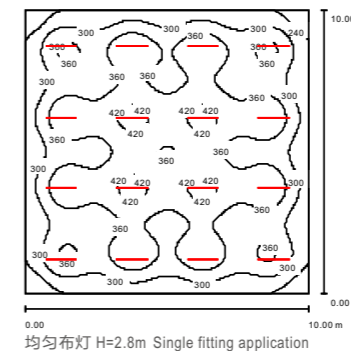

Item No	Power Flux	Number	W/m ²	H=2.8m Illuminance(Lux)
901B-SB1200T36W	36W / 3240 lm	16	5.76	342