


INFINITY RECESSED LUMINAIRE 758



产品细节 Details

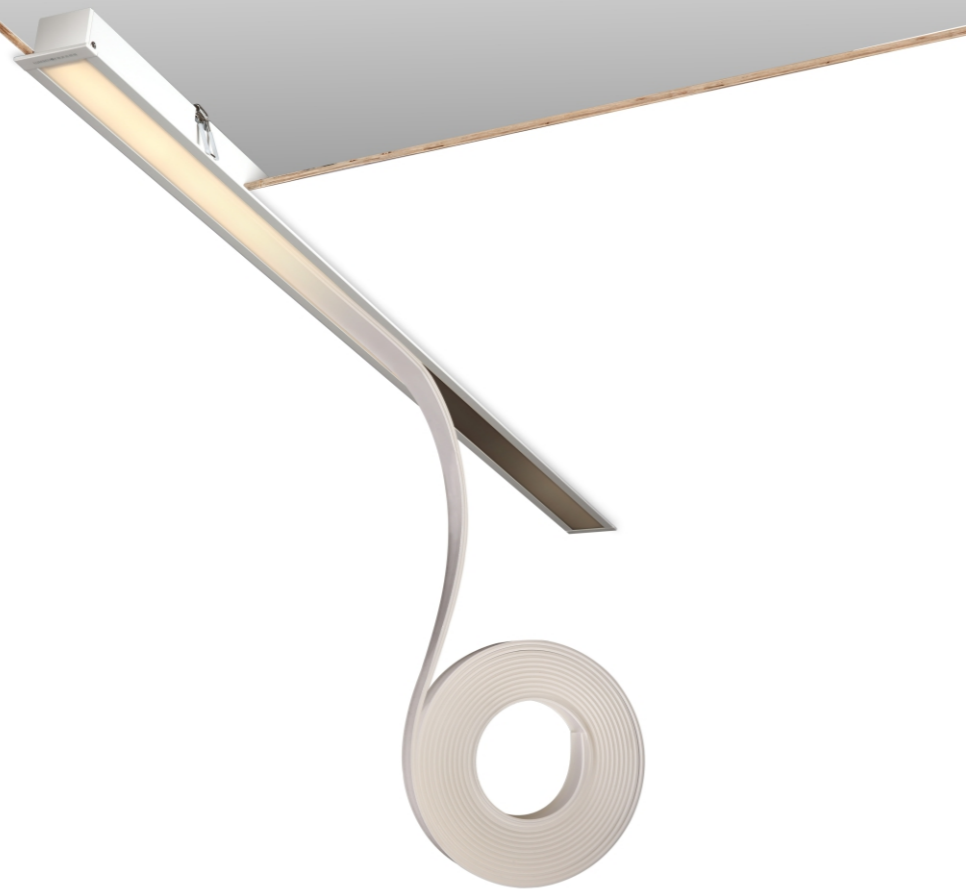

规格参数 Technical Data

名称: 758 嵌入灯/系统灯带
 类型: 嵌入灯
 灯体材料: 优质铝合金
 表面处理: 静电喷涂
 控光面罩: PMMA
 光源: SMD
 整灯光效: 80 lm/W
 显色指数: ≥83
 色温: 3000K/4000K/6500K
 输入电压: 220-240V
 驱动电源: 高转换率驱动电源
 灯具寿命: 3万小时
 电气等级: I

Product name: 758 Recessed luminaire/continuous lighting system
Type: Recessed luminaires
Housing material: High-quality Aluminum alloy
Surface finish: Electrostatic thermo-painting
Diffuser material: PMMA
Light source: SMD
Luminaire efficiency: 80 lm/W
CRI: ≥83
Color temperature: 3000K / 4000K / 6500K
Input voltage: 220-240V
Driver: High efficiency driver
Lifespan: 30000h
Electrical grade: I

Infinity 无限

758 嵌入灯/系统灯带




Recessed luminaires/
 continuous lighting system technical data sheet

758 线形嵌入灯, 采用优质铝合金型材灯体,压铸铝端盖, 外观尺寸比例科学, 结构合理, 安装维护方便灵活。PMMA高透光率散型散光罩根据LED光波长开发, 出光均匀无阴影、防眩光效果好, 控光面罩与灯体完美结合使整个灯具更加美观。先进的热管理技术, 散热优异, 确保了灯具最大光输出的持续性及色温的一致性。
 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共建筑等。
 亚克力盖板可以无限延伸。

758 Specification Grade Plaster Ceiling recess mount with Trim linear LED Luminaire. Housing made of high pressure extruded aluminum construction, Die-cast aluminum end cap. UV and Corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White. (Other colors available upon request). Slim Compact series with Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens. 736 series are also available in seamless continuous lighting system without visible dark spot or light gaps. Customized your own unique lighting system with our latest addition of system connection module accessories (L-shape / Cross-shape / T-shape). Simple and easy installation for every user. Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retail Etc. PMMA can be infinitely extended.




Indoor 室内适用	General lighting 基础照明	High efficiency 高光效	Long life 长寿命	Anti glare 防眩光	Accurate light distribution 准配光
No flickering 无频闪	IP 20 Protection level 防护等级	Protective grounding 保护接地	Fire protection 防火	Low lumen depreciation 低光衰	color-temp changing 调色温驱动电源
Microwave sensor 微波感应控制	Emergency kits 应急照明组件	DALI	light control 光控	Wifi or Ble, Zigbee	1-10V 1-10V dimming 1-10V调光
China Compulsory Certification 3C认证	CE certification CE认证	CB certification CB认证			

线型灯带 Linear light

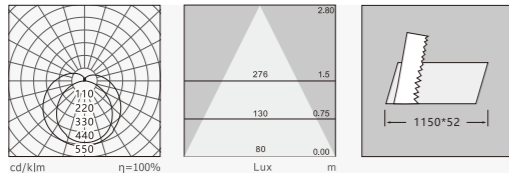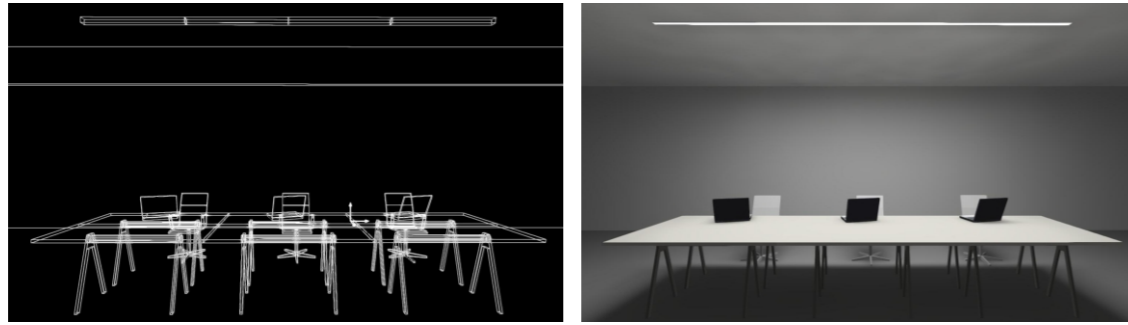


低功率 (HE)
CCT: 3000K
Colors: White

Item No	Power Flux	L*W*H
758-RM1160T18W	18W / 1440 lm	1160*60*60

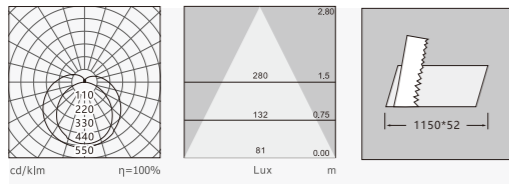



低功率 (HE)
CCT: 4000K
Colors: White

Item No	Power Flux	L*W*H
758-RM1160T18W	18W / 1460 lm	1160*60*60

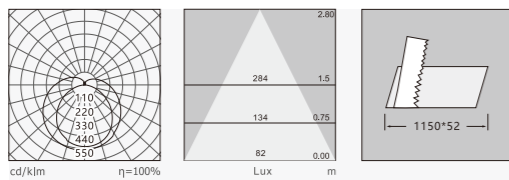




低功率 (HE)
CCT: 6500K
Colors: White

Item No	Power Flux	L*W*H
758-RM1160T18W	18W / 1480 lm	1160*60*60

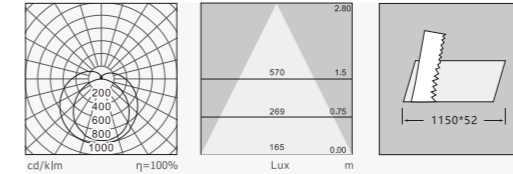


小功率 (HO-L)
CCT: 3000K
Colors: White

Item No	Power Flux	L*W*H
758-RM1160T36W	36W / 2880 lm	1160*60*60

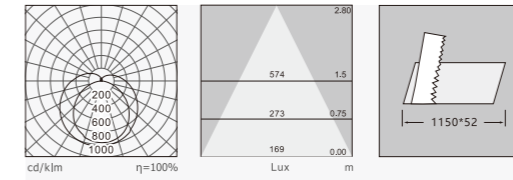

小功率 (HO-L)
CCT: 4000K
Colors: White


Item No	Power Flux	L*W*H
758-RM1160T36W	36W / 2900 lm	1160*60*60

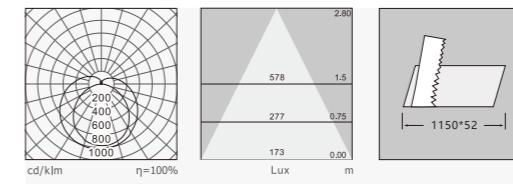

小功率 (HO-L)
CCT: 6500K
Colors: White

Item No	Power Flux	L*W*H
758-RM1160T36W	36W / 2920 lm	1160*60*60

关联产品 Related products




P179



P179



P191



P191





P197

光带转接头 Connection module


L形转接头 L-module				T形转接头 T-module			
Item No	Power Flux	L*W*H	Item No	Power Flux	L*W*H		
L758-RM	4.5W / 383 lm	190*190*105	T758-RM	6.75W / 574 lm	286*190*105		
L758-RM	9W / 765 lm	190*190*105	T758-RM	13.5W / 1148 lm	286**190*105		

X形转接头 X-module			
Item No	Power Flux	L*W*H	
X758-RM	9W / 765 lm	286*286*105	
X758-RM	18W / 1530 lm	286*286*105	


配件 Accessories

758 快速光带连接件 758 Quick continuous connector		758 安装卡扣 758 Installation buckle	
	Colors: Silver		Colors: Silver

线形光带示意图 Linear continuous connection demonstration

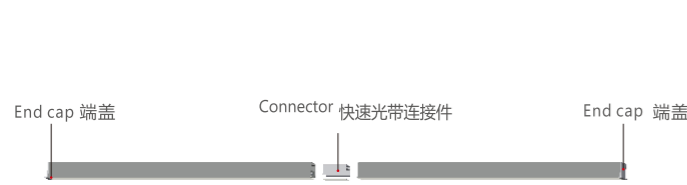


组合光带示意图 System combination demonstration

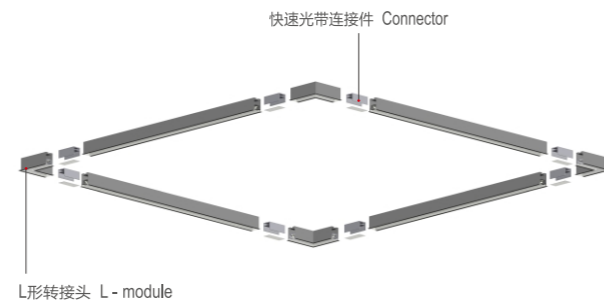

应用参考 Application reference

Open space: 10m x 10m x 3m; reflectance (%): ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height

开放式空间: 10m x 10m x 3m; 反射率(%): 天花板 80/墙壁50/地板20; 照度为 0.75m工作面平均照度; H为灯具安装离地高度。

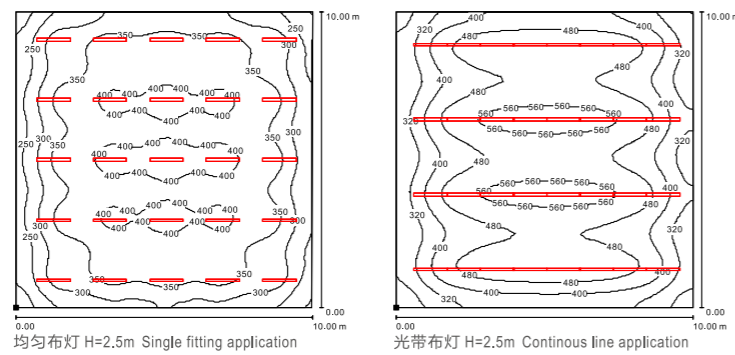

Item No	Power Flux	Number	W/m ²	H=2.8m Illuminance(Lux)
758-RM1160T18W	18W / 1460 lm	30	4.5	344
758-RM9545T153W	153W / 12240 lm	4	6.12	446



↑
Infinity 无限系列 758嵌入灯 办公场所实景图